

Jack 10.000 Kg




Description

Hydraulic jack for applications such as moving machinery, maintenance, construction, transport, engineering applications, maintenance trains, trucks, tractors, etc.. Complement ideal for tanks. They have a safety valve against overloading, gentle rise and fall, use temperature from -20 ° C to +50 ° C. Elevation from 30 to 260 mm from the ground. Rotary nail.

Technical data

Reference	12085
Dimensions (L x W x H)	326 x 170 x 420
Weight kg.	35
Measurements nail mm.	70 x 50
Elevation nail mm.	30 hasta 260
Max. Load kg.	10.000

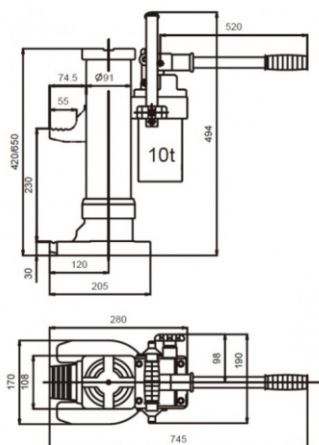

Jack 10.000 Kg

