

Jack 5.000 Kg




Description

Hydraulic jack for applications such as moving machinery, maintenance, construction, transport, engineering applications, maintenance trains, trucks, tractors, etc.. Complement ideal for tanks. They have a safety valve against overloading, gentle rise and fall, use temperature from -20°C to $+50^{\circ}\text{C}$. Elevation from 25 to 230 mm from the ground. Rotary nail.

Technical data

Reference	12084
Dimensions (L x W x H)	320 x 140 x 370
Weight kg.	25
Measurements nail mm.	70 x 50
Elevation nail mm.	25 hasta 230
Max. Load kg.	5.000

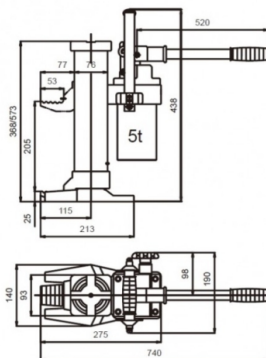

Jack 5.000 Kg

